

GTLZD, BIMETAL PIN LUG

Application:


Used for transition connection of aluminium cable or aluminium alloy cable with copper end of mini circuit breaker in low voltage.

Material: Al ≥ 99.5%, Cu ≥ 99.9%

Feature:

- Oil blocking structure
- Cylinder copper pin
- Friction welded
- Clear markings on barrel to indicate correct crimping location, together with DIN standard crimping die.
- Prefilled with jointing compound.

Standard: DIN 46329

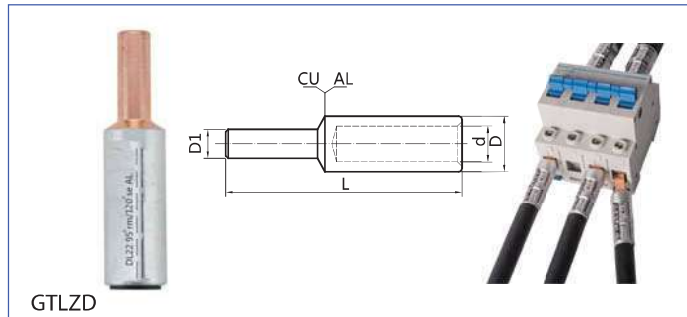

Type	Conductor Size (mm ²)	Dimensions				Pack(pcs)	Crimping Die
		L(mm)	d(mm)	D(mm)	D1(mm)		
GTLZD16	16	58.5	6	12	6	160x4	DL12
GTLZD25	25	60	6.8	12	6	160x4	DL12
GTLZD35	35	71.2	8	14	7	100x4	DL14
GTLZD50	50	74	9.8	16	8	100x4	DL16
GTLZD70	70	87	11.2	18.5	10	50x8	DL18
GTLZD95	95	91	13.2	22	12	40x8	DL22
GTLZD120	120	98	14.7	23	12	40x8	DL22
GTLZD150	150	109	16.3	25	12	30x4	DL25
GTLZD185	185	116	18.3	28.5	14	30x4	DL28
GTLZD240	240	128	21	32	16	25x4	DL32
GTLZD300	300	131	23.3	34	18	20x4	-