


MJPB, PRE-INSULATED ALUMINIUM CONNECTOR

MJPB pre-insulated connectors are designed for service and lighting cables.

- Material: Al \geq 99.5%
- Insulation sheath is made of weather and UV resistant material.
- Clear markings on insulation sheath to indicate crimping die, crimping sequence and times, cross-section of conductor and stripping length.
- Cross-section of conductor can be easily identified by the color of elastomeric cap.
- Elastomeric caps and pre-filled silicone grease ensure superior waterproof.
- Stripping of cable insulation is required before insertion.
- Tested by dielectrical voltage of 6kV for 1 minute under water.
- Standard: EN 50483-4 , NF C 33-021

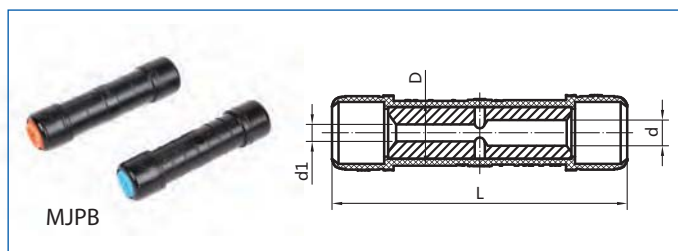

Type	Conductor Size(mm ²)	Dimensions(mm)				Color Code	Pack (pcs)	Crimping Die
		L	d	D	d1			
MJPB4/4	4	74	2.9	16	2.9	ivory	150x4	E140
MJPB4/6	4/6	74	3.3	16	2.9	ivory/brown	150x4	E140
MJPB4/10	4/10	74	4.3	16	2.9	ivory/green	150x4	E140
MJPB4/16	4/16	74	5.3	16	2.9	ivory/blue	150x4	E140
MJPB4/25	4/25	74	6.5	16	2.9	ivory/orange	150x4	E140
MJPB6/6	6	74	3.3	16	3.3	brown	150x4	E140
MJPB6/10	6/10	74	4.3	16	3.3	brown/green	150x4	E140
MJPB6/16	6/16	74	5.3	16	3.3	brown/blue	150x4	E140
MJPB6/25	6/25	74	6.5	16	3.3	brown/orange	150x4	E140
MJPB6/35	6/35	74	7.9	16	3.3	brown/red	150x4	E140
MJPB10/10	10	74	4.3	16	4.3	green	150x4	E140
MJPB10/16	10/16	74	5.3	16	4.3	green/blue	150x4	E140
MJPB10/25	10/25	74	6.5	16	4.3	green/orange	150x4	E140
MJPB10/35	10/35	74	7.9	16	4.3	green/red	150x4	E140
MJPB16/16	16	74	5.3	16	5.3	blue	150x4	E140
MJPB16/25	16/25	74	6.5	16	5.3	blue/orange	150x4	E140
MJPB16/35	16/35	74	7.9	16	5.3	blue/red	150x4	E140
MJPB16/50	16/50	74	8.8	16	5.3	blue/yellow	150x4	E140
MJPB25/25	25	74	6.5	16	6.5	orange	150x4	E140
MJPB25/35	25/35	74	7.9	16	6.5	orange/red	150x4	E140
MJPB25/50	25/50	74	8.8	16	6.5	orange/yellow	150x4	E140
MJPB35/35	35	74	7.9	16	7.9	red	150x4	E140
MJPB35/50	35/50	74	8.8	16	7.9	red/yellow	150x4	E140